


Parquet flooring MeisterParquet. longlife

PD 400 | naturally oiled

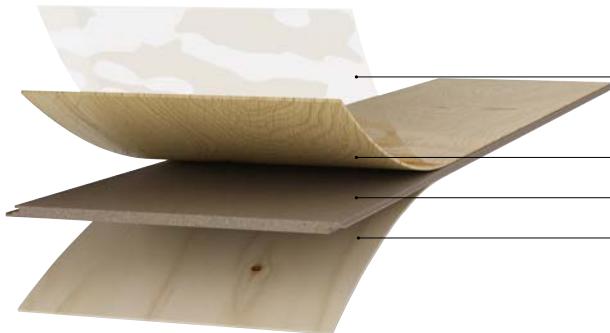

- a. Weartec Nature – treated ready for residential use, naturally oiled surface
- b. Approx. 2.5 mm fine wood wear layer
- c. HDF middle layer
- d. Backing (Nordic spruce veneer)

Tests	DIN/EN standard	Parquet flooring MeisterParquet. longlife PD 400 naturally oiled
General data on product composition		
Type of covering:		Flooring panel with top layer made from fine wood
Total thickness:		approx. 13 mm
Effective measurement: (length x width)		2,200 x 180 mm
Product structure:		<ul style="list-style-type: none"> a. Weartec Nature – treated ready for residential use, naturally oiled surface b. Approx. 2.5 mm fine wood wear layer c. HDF middle layer (approx. 890kg/m³ ± 3%) d. Backing (Nordic spruce veneer)
Technical data		
Locking method:		MasterclicPlus
	EN 13 501	Dfl-s1 (normally flammable) with floating installation / Cfl-s1 (hardly flammable) with full-surface bonding using the glue UZIN MK 250 NEW
	EN 717-1	Formaldehyde emissions (E1 = 0.1 ppm): ≤ 0.05 ppm
		<p>Underfloor heating: Suitable for hot-water underfloor heating Electrical underfloor heating is generally suitable when it is built into the floor screed or the concrete layer and thus does not lie on the concrete layer as foil heating. The heating elements pipes wires must lie across the entire area and not just be partly present. If the area is only partially heated, the floor covering must have expansion joints (system profile strips). The maximum permitted surface temperature is 29°C. Standard foil heating systems are generally not recommended. One exception is self-regulating heating systems which maintain the 29°C surface temperature. Floating installations - All woods are suitable – with beech, steamed beech, Canadian maple and European maple open joints may appear on the short sides due to the woods' naturally strong swelling and shrinking behaviour.</p>
Underfloor cooling:		A separate leaflet is available for laying on cooled floor constructions.
Heat transfer resistance:	EN 12 664	0.112 (m ² K)/W; with MEISTER-Silence 25 DB: 0.118 (m ² K)/W
Thermal conductivity:	EN 12 664	0.116 W/(m*K)
	ISO 140-8	Footfall noise reduction: with MEISTER-Silence 25 DB: 17dB

General data on environment, installation and care

Blue Angel:	RAL-UZ 176	awarded (except for Smoked oak)
Disposal:		Residual pieces can be disposed of in household refuse (e.g. thermal treatment) Dispose large quantities according to municipal provisions (e.g. recycling centres) An energetic utilization in authorized plants is recommended.
Cleaning and care:		Cleaning after completion of construction work/day-to-day cleaning: Dr. Schutz Premium Wood soap Freshening care: Dr. Schutz Premium care oil Special cleaning: Dr. Schutz Deep Clean
Areas of application:		The flooring is suitable for all dry living areas, e.g. living rooms, bedrooms as well as for commercial areas with medium or normal wear, e. g. hotel rooms. This flooring is not suitable for installing in humid rooms (bathrooms, saunas etc.).
Preconditions for installation:	DIN 18 356	The substrates must be ready for laying on according to the generally recognised rules of the trade taking into account VOB (German construction contract procedures), part C DIN 18 356 "parquetry work". The substrate must be dry (in the case of mineral substrates max. 2% with anhydrite screed max. 0.5% residual moisture – measured with CM devices), even, firm and clean. Additionally, any unevenness of 3mm per initial metre and 2mm per further metre must be evened out according to DIN 18 202, table 3, line 4. The installation instructions provided with the product must be observed.



www.blauer-engel.de/UZ176



PEFC Certified
PEFC04-31-1059



PEFC04-31-1059
PEFC Certified
ISO 14025 and EN 15804



THIRD-PARTY VERIFIED
Institut Bauen
und Umwelt eX



LONGLIFE
MEISTER
WARRANTY



RW 0103

MeisterWerke Schulte GmbH reserves the right to make alterations to material and structures when this serves to improve the quality.